




DiamondBack™ Trim

Cavitation elimination technology
for Valtek® Mark Series control valves



Experience In Motion

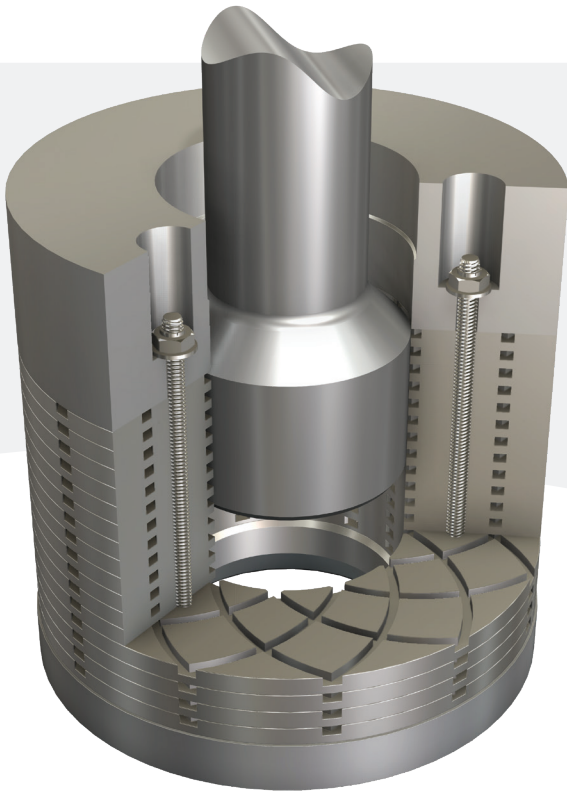

With DiamondBack trim, control valve users get reliable cavitation prevention with higher rangeability, increased capacity and superior solids-handling capability.

DiamondBack trim: A revolution in cavitation elimination

DiamondBack trim is a revolution in control valve cavitation elimination with unequalled performance, efficiency and versatility. Its unique design succeeds where other cavitation elimination technologies have failed.

When installed in Valtek Mark Series control valves, DiamondBack trim's simple, yet bold cartridge design:

- Effectively eliminates high pressure drop cavitation and associated noise
- Passes solids up to 13 mm (0.5 in) without plugging
- Delivers up to 30% higher flow over the same pressure drop in a smaller and lighter package
- Is customizable for the most rigorous application requirements
- Is available in all commonly specified materials (e.g., 300 and 400 series stainless steels and high-nickel alloys) as well as exotic alloys and tungsten carbide


With DiamondBack trim, control valve users can now simultaneously solve two age-old problems — cavitation and erosion — with one product.

Anti-cavitation mechanisms at work

DiamondBack trim employs all pressure drop mechanisms at the same time, efficiently absorbing and controlling pressure drop energy to eliminate the root causes of cavitation.

- Mutual impingement
- Sudden direction change
- Sudden contraction
- Sudden expansion
- Small passage friction
- Turbulent mixing

In just four stages, 23 pressure-drop mechanisms are engaged.

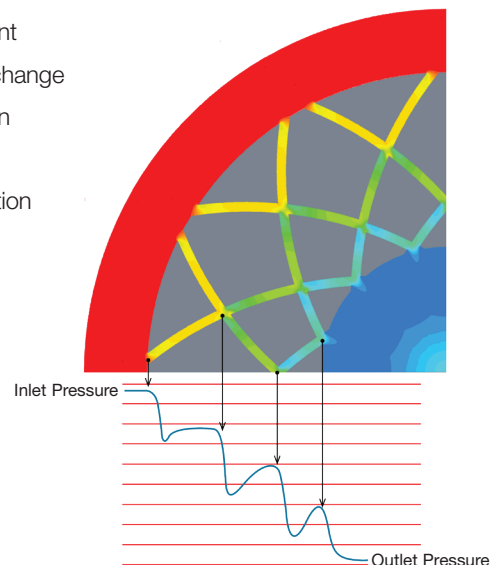

Product data

Base Valves: Valtek Mark One™, Mark 100 and Mark 200

Size Range: 1 to 24 NPS (25 to 600 DN)

Capacity Range: 1.24 to 7,500 Cv (1.07 to 6,480 Kv)




Flow Direction: Over the plug

Trim Characteristic: Linear, bi-linear, tri-linear or equal percent

Pressure Stages: 3 to 6

Pressure Drop: 500 to 5,000+ psi (34.5 to 349+ bar)

Cavitation Protection (Σ_{MR}): As low as 1.014

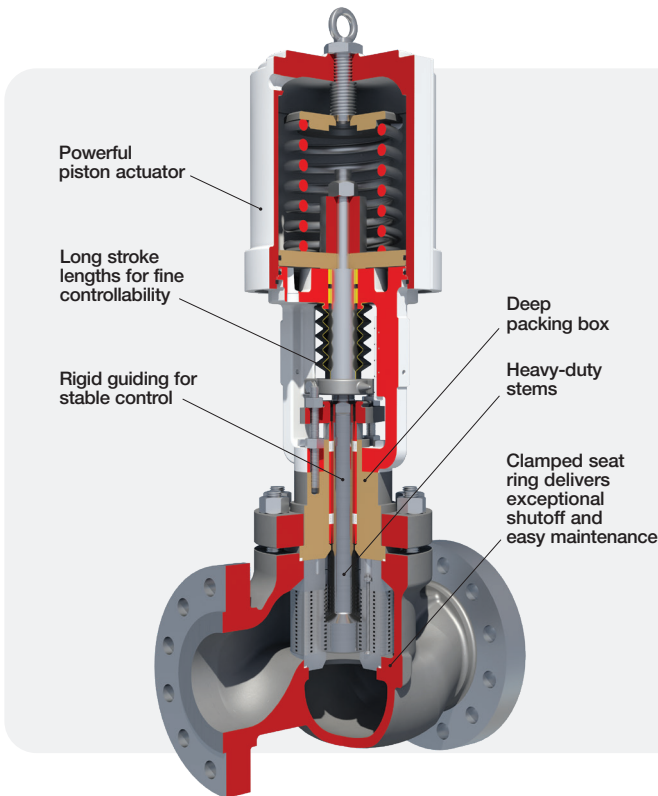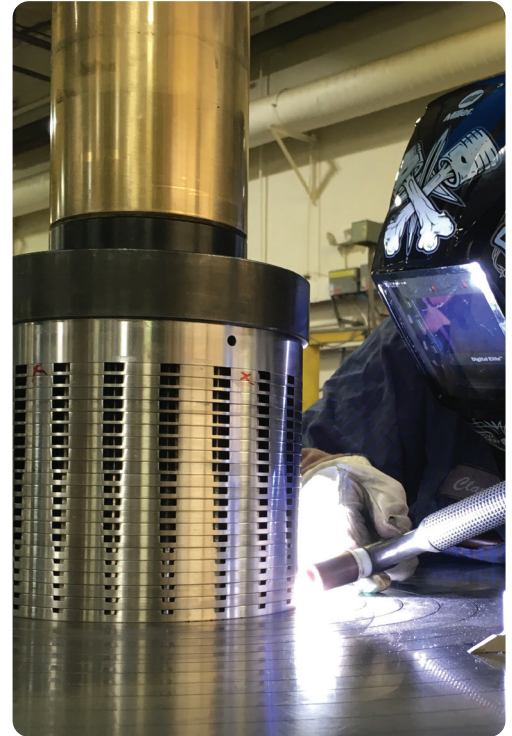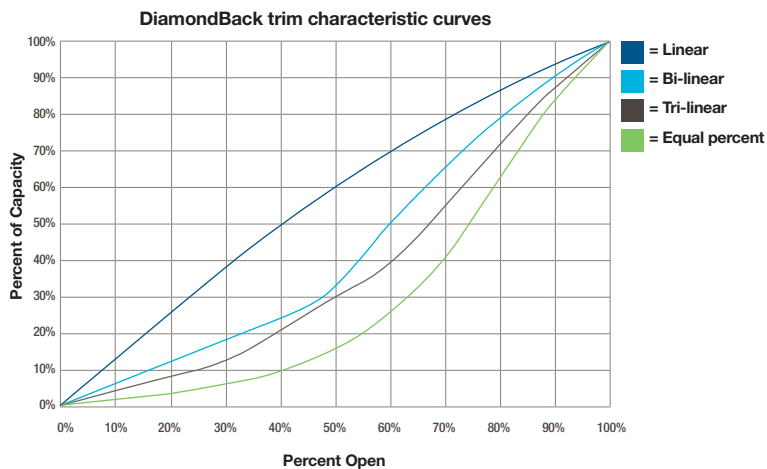

DiamondBack trim plus Mark Series valves

- Maximum cavitation protection
- Maximum flow efficiency
- Maximum erosion protection
- Maximum total value

Mark Series control valves

The Valtek Mark Series control valves are proven and preferred for:

- Extremely reliable, tight shutoff
- Fine control positioning accuracy and reliability
- High flow efficiency
- Robust and durable long-life design
- Quick and easy maintenance
- Proven reliable packing and gasket sealing



USA

Flowserve Flow Control Division
1350 N. Mt. Springs Parkway
Springville, UT 84663
USA
Phone: +1 801 489 8611
Fax: +1 801 489 3719

Austria

Flowserve Control Valves GmbH
Control Valves-Villach Operation
Kasernengasse 6
9500 Villach
Austria
Phone: 43 (0) 4242 41 181 0
Fax: 43 (0) 4242 41181 50

India

Flowserve India Controls Pvt Ltd.
Plot # 4, 1A, Road #8 EPIP
Whitefield
Bangalore, Karnataka, 560066
India
Phone: 91 80 40146200
Fax: 91 80 28410286

China

Flowserve Fluid Motion and
Control (Suzhou)Co., Ltd.
No. 35, Baiyu Road
Suzhou Industrial Park, Suzhou
Jiangsu Province, P.R. 215021
China
Phone: 86 512 6288 8790
Fax: 86 512 6288 8736

Saudi Arabia

Flowserve Abahsain Flow Control
Co., Ltd.
Makkah Road, Phase 4
Plot 10 & 12, 2nd Industrial City
Damman, Kingdom of Saudi Arabia
Phone: +966 3 857 3150 X 243
Fax: +966 3 857424

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2022 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.

VAFLY000481-01 (EN/A4) February 2022